

NEW

BOBCAT SKID STEER LOADER

Products

A K T / O

Thailand

MODEL : S590



SWEeper



WITH

BUCKET



Specifications Sweeper

	44 in.	48 in.	54 in.	60 in.	72 in.	84 in.
Sweep Width	44 in. (1118 mm)	48 in. (1219 mm)	54 in. (1372 mm)	60 in. (1524 mm)	72 in. (1829 mm)	84 in. (2134 mm)
Overall Width	48.3 in. (1227 mm)	52.3 in. (1328 mm)	58.3 in. (1481 mm)	66.2 in. (1681 mm)	78.2 in. (1986 mm)	89.9 in. (2284 mm)
Weight	555 lb. (252 kg)	595 lb. (270 kg)	650 lb. (295 kg)	758 lb. (344 kg)	845 lb. (383 kg)	975 lb. (442 kg)
Bucket Capacity, Heaped	6.6 cu. ft. (0.19 m ³)	7.3 cu. ft. (0.21 m ³)	8.2 cu. ft. (0.23 m ³)	12.0 cu. ft. (0.34 m ³)	14.4 cu. ft. (0.41 m ³)	18.5 cu. ft. (0.52 m ³)
Bucket Capacity, Swept	5.3 cu. ft. (0.15 m ³)	5.8 cu. ft. (0.16 m ³)	6.6 cu. ft. (0.19 m ³)	8.6 cu. ft. (0.24 m ³)	10.4 cu. ft. (0.29 m ³)	11.8 cu. ft. (0.33 m ³)
Broom Diameter	21.4 in. (544 mm)	21.4 in. (544 mm)	21.4 in. (544 mm)	21.4 in. (544 mm)	21.4 in. (544 mm)	24 in. (610 mm)
Bristle Material	← Replaceable polypropylene sections (steel sections available) →					
Cutting Edge	Replaceable steel					
Broom rpm @ 15 gpm	185	185	185	217	217	215
Wheel Kit	N/A	N/A	N/A	N/A	N/A	Optional
Gutter Brush	N/A	N/A	N/A	Optional	Optional	Optional

The Bobcat® S590 vertical path skid-steer loader provides more reach at full lift height than a radius lift path loader without sacrificing performance. It features a Tier 4 Interim engine.

Horsepower : 49.2 kW

Rated Operating Capacity : 952 kg

Operating Weight : 2,240 kg

Auxiliary Std Flow : 64.7 l/min

Auxiliary High Flow : 101.1 l/min (Optional)


Joystick Control : Optional

S590

Loaders

Specifications

Dimensions

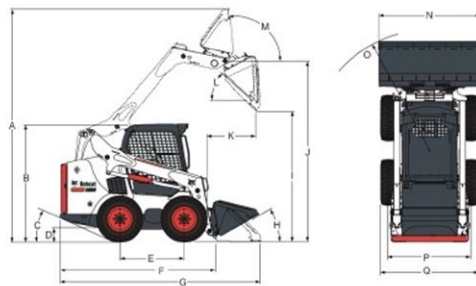

(A)	3901.0 mm	(J)	3023.0 mm
(B)	1972.0 mm	(K)	828.0 mm
(C)	24.2°	(L)	42.0°
(D)	185.0 mm	(M)	97.0°
(E)	1082.0 mm	(N)	1727.0 mm
(F)	2657.0 mm	(O)	2024.0 mm
(G)	3378.0 mm	(P)	1374.0 mm
(H)	30.0°	(Q)	1643.0 mm
(I)	2319.0 mm		